Manual

Mobile Rack S/ATA - Aluminium

english

www.equip-info.net

1. Features

- Aluminum Frame, Aluminum cover
- Interface: Support SATA - I, SATA - II
- High performance transfer rate up to 150MB/s, 300MB/s
- Plug & play, hot swappable
- Point to point, free from master/slave setting
- SATA 15Pin & 4Pin Power connectors
- Front Fan x 1, Dust resistant door
- 2 LED for Power & HDD access
- Power Control & Keylock design
- Magic Handle - Auto In/Out
- Color for choice: black or beige
- Dim: 188(L) X 146(W) X 42(H) mm

2. Installation

Magic Handle—Auto In/Out (see picture C)

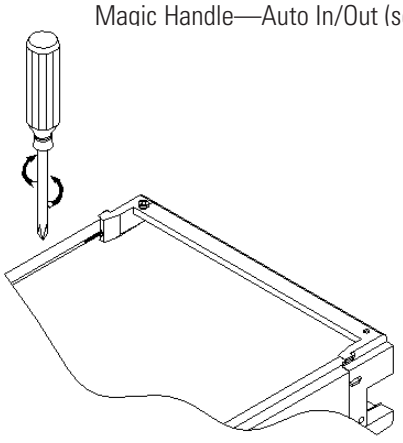

Pic. A

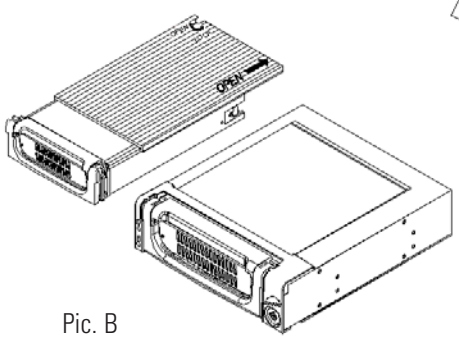

Pic. B

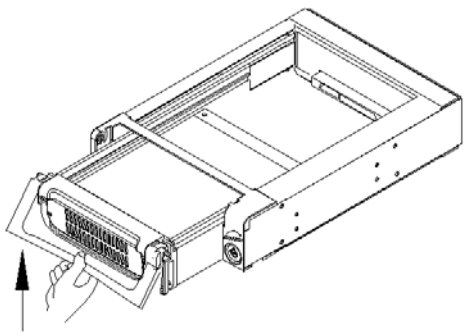

Pic. C

Power LED: Power on, LED indicates Green (see picture D - LED1)

Amber LED: blinking while HDD access (see picture D - LED1)

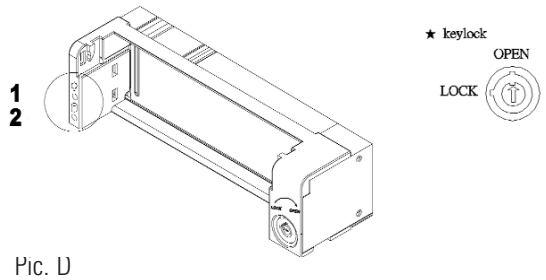

Pic. D

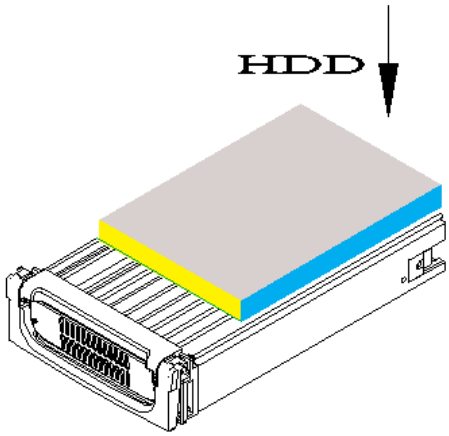

3. Back View

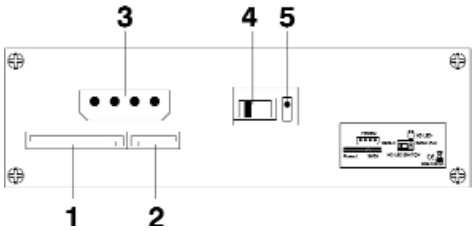

Pic. E

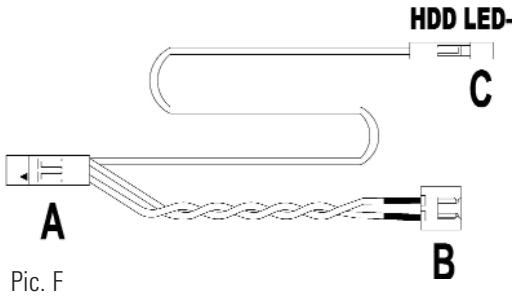

Pic. F

1. 15pin Serial ATA Power connector (Pic.E-1)
   If your power is from SATA 15pin connector, connect it to the 15pin connector
2. 7pin Serial ATA Signal connector (Pic.E-2)
3. 4pin Power connector (Pic.E-3)
   If your power is not from SATA 15pin connector, then, use the 4pin power connector;
   the 4pin power will automatically be converted to SATA power.
4. HD LED SWITCH (See Pic.E-4)
   When the Switch is adjusted to the left, the setting supports SATA-II HD LED;
   When the Switch is adjusted to the right, the setting supports SATA-I HD LED,
   but requiring external HD Access LED wiring (See Picture F).
5. External HDD Access pin connections
   HDD access connection (Note: "+" and "-" position). See it from motherboard manual.

How to connect (See Picture F)

Connect to pins on the motherboard (wire white color is "-"), (see picture F-A)
HD LED (to the computer LED), (see picture F-B)
Connect to HDD pins on the mobile rack (see picture F-C, picture E –5).